

AP2005012099 01 FEB 2006

DescriptionMethod and apparatus for making pods for products for infusionTechnical Field

The present invention relates to a method and an apparatus for making pods for products for infusion.

5 Background Art

In the current market of products for infusion, such as coffee, barley coffee, tea and camomile, the use of single-dose "pods" has increased considerably and a very popular way of making American-style coffee is now to use such pods in specially  
10 designed machines, even for household or office use (that is, for small to medium quantities).

This specification does not concern other forms of filter bags normally used to make American-style coffee and consisting of a "maxi dose" bag designed to be placed in a funnel-like container  
15 at the top of a machine that supplies boiling hot water. The hot water comes into contact with the coffee filter bag producing a brew of coffee which is simply allowed to drip into a cup below.

Unlike this type of solution - which is widely used and extremely popular - pods used to brew a single serving of beverage  
20 usually consist of two portions of filter paper placed one over the other and sealed to enclose a single product dose of circular shape.

In the specific case of pods for American-style coffee, the product is not (and must not be) excessively compressed, which  
25 means that it remains relatively loose inside the pod.

For technical reasons linked to the type of machines used to make them, the pods have an asymmetrical profile, that is to say, with one flat surface (defined by one of the portions of filter paper) and one cupped surface (defined by the other portion of  
30 filter paper) containing the dose of infusion product.

One prior art method and related apparatus for making this type of pod is described in patent EP-432.126. The method disclosed therein comprises the following sequence of steps:

- feeding a first web of filter paper to a station where  
5 suitable means cause the filter paper to be wrinkled or crinkled;

- moving the web of filter paper along the surface of a forming drum, provided with circular pockets and with suction means, and simultaneously training a belt in contact with the filter paper, with the filter paper being between the belt and the  
10 surface of the forming drum, so that spaced areas of the belt are pulled by suction into the pockets in the drum, drawing the filter paper along with it in such a way as to form a succession of pouches in the filter paper;

- filling a dose of product into each pouch by means of a dosing station located downstream of the suction drawing belt in the direction of rotation of the pouch forming drum and consisting of a second revolving drum synchronised with the pouch forming drum;

- joining the first web of filter paper, provided with the product filled pouches, to a second web fed at a respective  
20 sealing station located downstream of the filling station, again relative to the direction of rotation of the forming drum;

- cutting out the pods thus made and feeding them out towards further packaging stations.

25 This method and the apparatus that embodies it have several disadvantages due to:

- the need to pre-process the web of filter paper to make it suitable for forming the pouches, which means that the apparatus requires an additional station; this operation being necessary  
30 especially when two or more parallel rows of pouches are formed in the filter paper web; and

- the possible difficulty of accurately controlling the volume of product filled into each pouch on account of the two revolving cylindrical surfaces of the drums (dosing and forming);  
35 this can cause a certain amount of product being lost as it is gravity fed into the pouch.

The aim of the present invention is to overcome the above

mentioned drawbacks by providing a method and an apparatus for making pods containing products for infusion that is at once practical, fast, reliable in dosing the product and structured in such a way as to require a limited number of operating stations.

5

#### Disclosure of the invention

According to the invention, this aim is achieved by a method for making pods for products for infusion comprising the steps of: feeding a first portion of filter material; making a compressed disk of product, the disk being equivalent to a single dose of the product, at respective dosing and forming stations; placing the compressed disk on the first portion of filter material; and associating a second portion of filter material over the first portion of filter material with the compressed disk on it in such a way as to form the pod.

15

#### Brief description of the drawings

The technical characteristics of the invention, with reference to the above aims, are clearly described in the claims below and its advantages are apparent from the detailed description which follows, with reference to the accompanying drawings which illustrate preferred embodiments of the invention provided merely by way of example without restricting the scope of the inventive concept, and in which:

20

- Figure 1 is a schematic side view of an apparatus according to the present invention for making pods for products for infusion embodying a method for making the pods according to the present invention;

25

- Figure 2 is a schematic side view of a pod for products for infusion made using the method and apparatus of Figure 1;

30

- Figure 3 is a scaled-up view of a station forming part of the apparatus of Figure 1, that is to say, a side view, with some parts cut away and others in cross section in order to better illustrate certain details, of a station for forming and dosing a disk of product for infusion;

35

- Figure 4 is a cross-section through line IV - IV of Figure 3;

- Figure 5 is a side view illustrating the motion of the forming means of Figure 3.

Detailed description of the preferred embodiments of the invention

5 With reference to the accompanying drawings, in particular Figures 1 and 2, the method and apparatus according to the invention are used to make pods 1, usually single-dose pods, of filter material containing a product for infusion, such as but not restricted to, a blend of ground coffee.

10 For simplicity, the term filter paper will be used hereinafter to denote the lengths or webs defining the containers of the infusion product, it being understood that the term paper is used in a non-restrictive sense to include any material suitable for making the filtering part of the pod 1.

15 The pods 1 have a traditional asymmetrical shape and comprise filter paper enclosing individual doses of product that is not excessively compressed.

The method according to the invention basically comprises the following steps:

20 - making at least one compressed disk 2 of product, equivalent to a dose of the product, at respective dosing and forming stations 3, 4; and

- forming the pod 1 with the compressed disk 2 positioned inside the filter paper.

25 During the step of making the disk 2, compression is preferably accomplished by tamping.

30 More specifically, the pods 1 contain the product enclosed between two lengths 5 and 6 of filter paper that are associated with each other and sealed, the length 5 being substantially flat and the length 6 having a cupped portion for receiving the product disk 2.

In this specific form, the pod 1 is made in the following steps:

35 - feeding a first portion 5 of filter paper;  
- making the compressed disk 2 of product, equivalent to a dose of the product, at respective dosing and forming stations 3 and 4;

- placing the compressed disk 2 on the first portion 5 of filter paper;

- associating a second portion 6 of filter paper over the first portion 5 of filter material with the compressed disk 2 on it in such a way as to form the pod 1.

As illustrated in Figure 1, the first and second portions of filter paper are obtained from webs 5 and 6 of the filter paper and the first web 5 is fed preferably in a straight line.

Alternatively, the first web 5 may follow an inclined feed path (see dashed line in Figure 3) to partially follow the shape of the forming station 4 so as to facilitate the releasing of the disk 2.

Between the step of placing the compressed disk 2 and the associating step there is a further step of making in the second portion 6 of filter paper a counter-impression 7 shaped to match the disk 2 and designed to be placed over the disk 2.

The step of associating the first and second portions 5 and 6 of filter paper may be accomplished by heat sealing.

It is contemplated that the associating step is followed by a step of cutting the first and second portions 5 and 6 of filter material to form the pod 1, which may, for example, but without restricting the scope of the invention, be circular in shape.

Returning to the step of making the disk 2 (see Figures 3 and 5), this may comprise the following sub-steps:

- depositing a dosed quantity of the product in a respective impression 8 while moving along a first defined path, labelled P1, within the forming station 4; and

- compressing the dose of product inside the impression 8 while moving along a second defined path, labelled P2, following the first path P1.

Preferably, the first and second paths P1 and P2 are arc-shaped and cover respective angles ( $\alpha$ ) and ( $\beta$ ) following each other (as described in more detail below).

Again with reference to Figures 3 and 5, it is contemplated that between the dosing and compressing sub-steps there is a step of levelling off P3 the dosed product inside the impression 8 so as to obtain exactly the right quantity of product in the

impression 8.

The compression step is followed by the aforementioned step of depositing the compressed disk 2 by allowing it to drop out of the respective impression 8 by gravity onto the first portion 5 of filter paper (see Figure 3) where it is held in place preferably by suction.

The apparatus 9 embodying the method according to the invention as described above essentially comprises the following stations:

10       - two independent stations 10 and 11 for feeding respective webs 5 and 6 of filter paper;

         - a station 12 for feeding the first web 5 of filter paper in a feed direction A and at least to

15       - a station 3 for dosing individual doses of the product into at least one forming impression 8 located on means 4 for forming a respective compressed disk 2 of the infusion product and releasing the disk 2 onto the first web 5 of filter material;

         - a station 13 for associating the first portion 5 of filter paper with the second web 6 of filter paper to form the pod 1.

20       The apparatus 9 broadly outlined above may further comprise:

         - a station 14 located downstream of the dosing and forming station 3 in the feed direction A and designed to make a counter-impression 7 in the second web 6 of filter paper and to place the counter-impression 7 over the product disk 2;

25       - a station 15 located downstream of the associating station 13 and designed to cut off the disk 2 encapsulated in the two webs 5 and 6 of filter paper to form a pod 1 that is, for example, circular in shape;

30       - a station 16 for separating the circular pod 1 from the waste material 17, which is collected in a recovery station 18.

Looking more closely at the constructional details, the feed stations 10 and 11 that unwind the webs 5 and 6 may comprise respective rolls of filter paper.

35       More specifically, the second web 6 may be wider than the first web 5 so as to better accommodate the compressed disk 2.

As shown in Figure 3, the feed station 12 comprises a first endless belt 19, trained around a pair of power driven sheaves 20

and 21.

The surface of the first belt 19 is preferably perforated or porous so as to enable means 22 for creating a vacuum to interact with the working section of the first belt 19: this is the belt section that feeds the first filter paper web 5 and is where the product disk 2 is deposited and held by suction correctly in place on the first filter paper web 5 (the means 22 are illustrated schematically since they are of known type).

With reference to Figure 3 again, the dosing station 3 comprises a fixed hopper 23 mounted to face a first revolving drum 24 (see arrow F24) forming part of the forming means 4.

The hopper 23 has an arc-shaped discharge portion to peripherally follow a passing surface of the first drum 24 in such manner that the product is dosed in a predetermined area.

Figures 3 and 4 show that the first revolving drum 24 is equipped with a plurality of pistons 25 arranged radially on the surface of the first drum 24, each piston 25 having a hollow head 26 defining the impression 8 for receiving a dose of the product fed by the hopper 23.

As illustrated in detail below, each of the pistons 25 can perform a series of synchronised movements in a radial direction, thanks to drive means 27, while also rotating continuously about its axis in such a way as to allow the disk 2 to be properly formed as described above and at the same time keeping the disk 2 compressed and detached from the walls of the hollow head 26 defining the impression 8.

To do this, the aforementioned radial drive means 27 are fitted between each piston 25 and the first drum 24 to act upon the pistons 25 in such manner as to impart the plurality of synchronised movements to the pistons 25 according to their angular positions on a circular path, labelled P, and so as to:

- receive the product;
- compress the product to form the disk 2; and
- detach and deposit the disk 2 onto the first web 5 of filter paper.

Looking in more detail, the radial drive means comprise cam means 27 consisting of at least one guide cam profile 28 stably

associated with the interior of the first drum 24 and engaged by a cam follower roller 29 for each piston 25.

Each cam follower roller 29 is rigidly attached to the end of a respective connecting rod 30 whose other end is associated with a control pin 31 rotatably connected to the inside end of the cylinder 25c of the piston 25 so as to drive the piston 25 radially in both directions according to the angular position of the piston 25 on the circular path P.

In other terms, the control pin 31 is in rotatable contact, through a bearing 31c, with the base of the cylinder 25c so as to drive the piston 25 backwards and forwards (see arrows F25) according to the movements of the cam follower roller 29.

The movements of the pistons 25 are indicated in the diagram of Figure 5. As shown, each piston 25 starts at an imaginary zero point P0 where it is perpendicular to the first belt 19, and performs the following movements:

- in a first section P4 the piston 25 is moved radially towards the inside of the first drum 24 to a product dosing position, that is to say, in such a way that the head 26 is moved away from the arc-shaped section of the hopper 23 and the piston 25 reaches a point P4A corresponding to its bottom dead centre;

- in the aforementioned dosing path P1, the piston 25 is initially away from the arc-shaped section of the hopper 23, so as to collect as much product as possible in the head 26, and then starts moving a little in a radial direction towards the outside of the first drum 24 until it reaches the endpoint P3 of the hopper 23 where there is a wall 23a for levelling off the product accommodated in the impression 8;

- during feed along the path P2 for tamping the disc 2, the piston 25 continues moving radially towards the outside of the first drum 24 and against a stop wall 35 until it reaches its top dead centre, corresponding to the point P2M, where it remains until it starts on a path section P5;

- thus, just before returning to the zero point P0 where the disk 2 is released, the piston 25 starts moving back up along the arc-shaped path section P5 in order to facilitate detachment of the disc 2 from the impression 8.



To enable these movements to be performed precisely, the cam profile 28 is divided into two arc-shaped sections 28a, 28b, a fixed lower section 28a and an adjustable upper section 28b corresponding to the part of the path P of the pistons 25 comprising at least the dosing path P1: this makes it possible to accurately gauge the positions between the impression 8 and the hopper 23 so as to control the volume of product that goes into the impression 8.

More specifically, the half arc defining the section 28b can be adjusted, in both directions, as indicated by the arrow F28b, so as to increase or decrease the distance between the piston head 26 and the levelling off point P3 corresponding to the volume of product inside the head 26 but without changing the endpoints of the half arc 28b.

As mentioned above, the pistons 25 can rotate continuously about their axes (see arrow F32 in Figure 4) thanks to rotational drive means 32 located on the first drum 24 and acting on each piston 25.

The rotational drive means 32 may comprise a fixed ring gear 33 mounted inside the first drum 24 and meshed with corresponding gear wheels 34 keyed to the respective cylinder 25c of each piston 25 so that the pistons 25 revolve continuously as they move round the circular path P.

The rotation of each piston 25 has the effect of tamping the disk 2 but without allowing the surface of the product to adhere to the surface of the head 26 of the piston 25 within the impression 8: this means that when the disk 2 is subsequently released onto the first web 5 of filter paper, the disk 2 is detached fully and cleanly.

As mentioned above, there are arc-shaped walls 35 and 36 round the outer surface of the first drum 24 designed to permit the pistons 25 to be pushed against the impressions 8 of the pistons 25 in a part of the circular path P and in such a way as to co-operate with the pistons 25 at least when the disk 2 is formed and compressed.

As also mentioned above with reference to the steps in the method according to the invention, the first web 5 of filter paper

may be fed along a slightly inclined path at least when it is in the general vicinity of the outside surface of the drum 24 where the piston 25 starts retracting just before releasing the disk 2 on the first web 5: this further improves detachment of the disk 2 from the head 26 of the piston 25.

Returning to Figure 1, the station 14 that forms a counter-impression 7 in the second web 6 of filter paper may comprise a second drum 37 presenting a plurality of recesses 38 distributed uniformly on its outer surface around which the second web 6 of filter paper moves.

The second drum 37 is acted upon by means 39 that form the counter-impression 7 in the second web 6 of filter paper.

In a non-restricting embodiment of the invention provided purely by way of example, the forming means 39 act on a part of the outer surface of the drum 37 and consist of a section of a second endless forming belt 39 equipped with protrusions 40 positioned and shaped to match the recesses 38 as the latter move round: these protrusions make the counter-impressions 7 in the second web 6 which is moving along between the second drum 37 and the second belt 39.

The forming action is accomplished by drawing spaced areas of the second web 6 into the recesses 38 and holding them inside by suction generated within the second drum 37.

The aforementioned associating station 13 is located under the second drum 37 and may comprise a circular sealing element 41 designed to join the first web 5, which accommodates the disk 2, to the second web 6 of filter paper placed over the disk 2 to form a succession of sealed pods 1.

The sealed pods 1 are fed to the aforementioned cutoff station 15 which may comprise a circular knife 15a and a counter-knife 15b positioned on opposite sides of the feed line A of the first and second webs 5 and 6 of filter material sealed to each other and forming a succession of pods 1 which, in this preferred embodiment, are circular.

After being cut, the circular pods 1 are separated from the waste material 17 at the station 16, for example by an ejection device 16a, while the waste material 17 is collected at the

recovery station 18 (for example by suction).

After being separated, the pods 1 are conveyed to further packaging stations which are not illustrated.

5 A method and apparatus as described above permit pods containing an infusion product to be made extremely rapidly with precisely measured doses of product and cleanly formed product disks.

10 The special structure of the dosing and forming unit makes it possible to achieve high production speeds even using single rows of impressions on the webs of filter paper, thus making apparatus design simpler and more flexible.

15 The possibility of first forming the product disk and then placing it on a flat web of filter paper makes it possible to improve the efficiency and reduce the size of the apparatus thanks to a more streamlined production line.

20 The dosing and forming station creates an extremely compact and clean disk of precisely dosed product thanks to the simultaneous translational and rotational movements of the forming pistons: the translational movement controls the steps of dosing, forming and releasing the product disk, whilst the rotational movement enables the disk to be tamped quickly and in a short path length and without allowing it to adhere to the surface of the impression.

25 The invention described has evident industrial applications and may be subject to modifications and variations without thereby departing from the scope of the inventive concept. Moreover, all the details of the invention may be substituted by technically equivalent elements.

Claims

1. A method for making pods (1) of filter material containing products for infusion, characterised in that it comprises at the least the following steps:
- making at least one compressed disk (2) of product, equivalent to a dose of the product, at respective dosing and forming stations (3, 4);
  - forming the pod (1) with the compressed disk (2) positioned inside the filter paper.
2. The method according to claim 1, characterised in that the step of making the disk (2) comprises a step of tamping to compress the product.
3. The method according to claim 1, where the pods (1) comprise two pieces (5, 6) of filter material placed over each other and sealed and containing a dose of the product for infusion, the method being characterised in that it further comprises at least the following steps:
- feeding a first portion (5) of filter material;
  - making the compressed disk (2) of product, equivalent to a dose of the product, at respective dosing and forming stations (3, 4);
  - depositing the compressed disk (2) on the first portion (5) of filter material;
  - associating a second portion (6) of filter material with the first portion (5) of filter material to encapsulate the compressed disk (2) to form the pod (1).
4. The method according to claim 3, characterised in that the first and second portions of filter material are obtained from webs (5, 6) of the same filter material.
5. The method according to claim 3, characterised in that the first portion of filter material is obtained from a web (5) fed in a straight line.
6. The method according to claim 3, characterised in that between the step of placing the compressed disk (2) and the associating step there is a further step of making in the second portion (6) of filter material a counter-impression (7) shaped to match the disk (2) and designed to be placed over the disk (2).

7. The method according to claim 1 or 3, characterised in that the step of making the disk (2) comprises the sub-steps of:

- depositing a dosed quantity of the product in a respective impression (8) while moving along a first defined path (P1) of the forming station (4); and
- compressing the dose of product inside the impression (8) while moving along a second defined path (P2) following the first path (P1).

8. The method according to claim 7, characterised in that between the dosing and compressing sub-steps there is a step of levelling off the dosed product inside the impression (8).

9. The method according to claim 7, characterised in that the first and second paths (P1, P2) are arc-shaped and cover respective angles ( $\alpha$ ) and ( $\beta$ ) following each other.

10. The method according to claim 3, characterised in that the depositing step is accomplished by allowing the compressed disk (2) to drop out of a respective impression (8) by gravity onto the first portion (5) of filter material.

11. The method according to claim 3, characterised in that the depositing step is accomplished by allowing the compressed disk (2) of product to drop out of a respective impression (8) by gravity onto the first portion (5) of filter material where it is held in place by suction.

12. The method according to claim 3, characterised in that the step of associating the first and second portions (5, 6) of filter material is performed by heat sealing.

13. The method according to claim 3, characterised in that the associating step is followed by a step of cutting the first and second portions (5, 6) of filter material to form the pod (1).

14. An apparatus for making pods (1) containing products for infusion, the pods (1) being of the type comprising two pieces of filter material placed over each other and sealed and containing a dose of the product for infusion; the apparatus (9) comprising at least two independent stations (10, 11) for feeding respective portions (5, 6) of filter material and being characterised in that it comprises at least the following:

- a station (12) for feeding the first portion (5) of filter material in a feed direction (A) and at least to
  - a station (3) for dosing individual doses of the product into at least one forming impression (8) located on means (4) for forming a respective disk (2) of the infusion product and releasing the disk (2) onto the first portion (5) of filter material;
  - a station (13) for associating the first portion (5) of filter material with the second portion (6) of filter material to form the pod (1).
15. The apparatus according to claim 14, characterised in that, downstream of the dosing and forming station (3) in the feed direction (A), it comprises a station (14) for making a counter-impression (7) in the second portion (6) of filter material and placing the counter-impression (7) over the product disk (2).
16. The apparatus according to claim 14, characterised in that the two stations (10, 11) for feeding the filter material unwind respective webs (5, 6) of the filter material.
17. The apparatus according to claim 14, characterised in that, downstream of the associating station (13), it comprises a station (15) for cutting off the disk (2) encapsulated in the two portions (5, 6) of filter material to form a pod (1).
18. The apparatus according to claim 17, characterised in that it comprises a station (16) for separating the pod (1) from the waste material (17), which is collected in a recovery station (18).
19. The apparatus according to claim 14, characterised in that the feed station (12) comprises a first endless belt (19), trained around a pair of sheaves (20, 21) and having a perforated or porous surface; means (22) being provided for creating a vacuum at least at the working section of the first belt (19) which feeds the first portion (5) of filter material and on which the product disk (2) is deposited.
20. The apparatus according to claim 14, characterised in that the dosing station (3) comprises a fixed hopper (23) mounted to face a first revolving drum (24), forming part of the forming means (4); the hopper (23) having an arc-shaped discharge portion

to peripherally follow a passing surface of the first drum (24) in such manner that the product is dosed in a predetermined area.

21. The apparatus according to claim 14, characterised in that the means (4) for forming the disk (2) comprise a first revolving  
5 drum (24) equipped with a plurality of pistons (25) arranged radially on the surface of the first drum (24) and having a hollow head (26) designed to receive a dose of the product fed by the dosing station (3); radial drive means (27) being provided between  
10 each piston (25) and the first drum (24) to act upon the pistons (25) in such manner as to impart a plurality of synchronised movements to the pistons (25) according to their angular positions on a circular path (P) and so as to receive the product, compress the product to form the disk (2), detach and deposit the disk (2) onto the first portion (5) of filter material.

22. The apparatus according to claim 21, characterised in that the radial drive means comprise cam means (27) consisting of at least one guide cam profile (28) stably associated with the interior of the drum (24) and engaged by a cam follower roller (29) for each piston (25); each cam follower roller (29) being  
20 attached to the end of a respective connecting rod (30) whose other end is associated with a control pin (31) rotatably connected to the inside end of the cylinder (25c) of the piston (25) so as to drive the piston (25) radially in both directions according to the angular position of the piston (25) on the  
25 circular path (P).

23. The apparatus according to claims 21 and 22, characterised in that the cam means (27) cause each single piston (25) to be positioned according to movements referenced to a relative position or angular section of the circular path (P) and  
30 corresponding to:

- a first arc-shaped path section (P4) where the piston (25) is radially retracted towards the first drum (24) in such a way that the piston (25) moves into a product dosing configuration when it reaches a point (P4A) corresponding to its bottom dead centre;
- 35 - a second arc-shaped path section (P1) for dosing where the piston (25) is initially at the bottom dead centre (P4A), in such manner as to collect as much product as possible in the head (26),

and moves in a radial direction towards the outside of the first drum (24) until it reaches the endpoint (P3) of the dosing station (3) where there is a wall (23a) for levelling off the product accommodated in the impression (8);

- 5     - a third arc-shaped path section (P2) for tamping the disc (2), where the piston (25) moves radially towards the outside of the first drum (24) and against a stop wall (35) corresponding to its top dead centre (P2M) where it remains until it starts on
- 10    - a fourth arc-shaped path section (P5) where the piston (25) moves back up in order to facilitate detachment of the disc (2) from the impression (8) just before reaching the point (P0) where the disc (2) is released.

24. The apparatus according to claim 22, characterised in that the cam profile (28) is divided into two arc-shaped sections (28a, 28b), a fixed lower section (28a) and an adjustable upper section (28b) corresponding to a part of the path (P) of the pistons (25) comprising at least one area where the product is filled into the pistons (25).

25. The apparatus according to claim 21, characterised in that the first drum (24) is equipped with rotational drive means (32) acting on each piston (25) and designed to continuously revolve each piston (25) about its axis; the rotational drive means (32) comprising a fixed ring gear (33) mounted inside the first drum (24) and meshed with corresponding gear wheels (34) keyed to the respective cylinder (25c) of each piston (25) so that the pistons (25) revolve continuously as they move round the circular path (P), thus tamping the disk (2) and preventing it from sticking inside the head (26) of the piston (25) while enabling the disk (2) to be detached completely when it is deposited on the first portion (5) of filter material.

26. The apparatus according to claim 21, characterised in that there are arc-shaped walls (35, 36) round the outer surface of the first drum (24) designed to permit the pistons (25) to be pushed against the impressions (8) in a part of the circular path (P) and in such a way as to co-operate with the pistons (25) at least when the disk (2) is formed and compressed.



27. The apparatus according to claim 21, characterised in that the first portion (5) of filter material is fed close to the first drum (24) along an inclined path that partially and peripherally follows the surface of the first drum (24) in an area close to where the disk (2) is deposited on the first portion (5) of filter material.


28. The apparatus according to claim 21, characterised in that the station (14) for making the counter-impression (7) on the second portion (6) of filter material comprises a second drum (37) presenting a plurality of recesses (38) distributed uniformly on its outer surface to which the second portion (6) of filter material is held by suction; one section of a second endless forming belt (39) being located and operative on a portion of the surface of the second drum (37) and being equipped with protrusions (40) positioned and shaped to match the recesses (38) as the latter move round, thus making a counter-impression (7) on the second portion (6) placed between the second drum (37) and the second belt (39) by pushing the second portion (6) into the recesses (38).

29. The apparatus according to claims 14 and 28, characterised in that the associating station (13) comprises a circular sealing element (41) positioned under the second drum (37) and designed to seal the first portion (5) of filter material, with the disk (2) on it, to the second portion (6) of filter material placed over the disk (2) to form a succession of sealed pods (1).

30. The apparatus according to claims 17, characterised in that the cutoff station (15) comprises a circular knife (15a) and a counter-knife (15b) positioned on opposite sides of a feed line (A) of the first and second portions (5, 6) of filter material sealed to each other and forming a succession of pods (1).

**THIS PAGE BLANK (USPTO)**

1/4

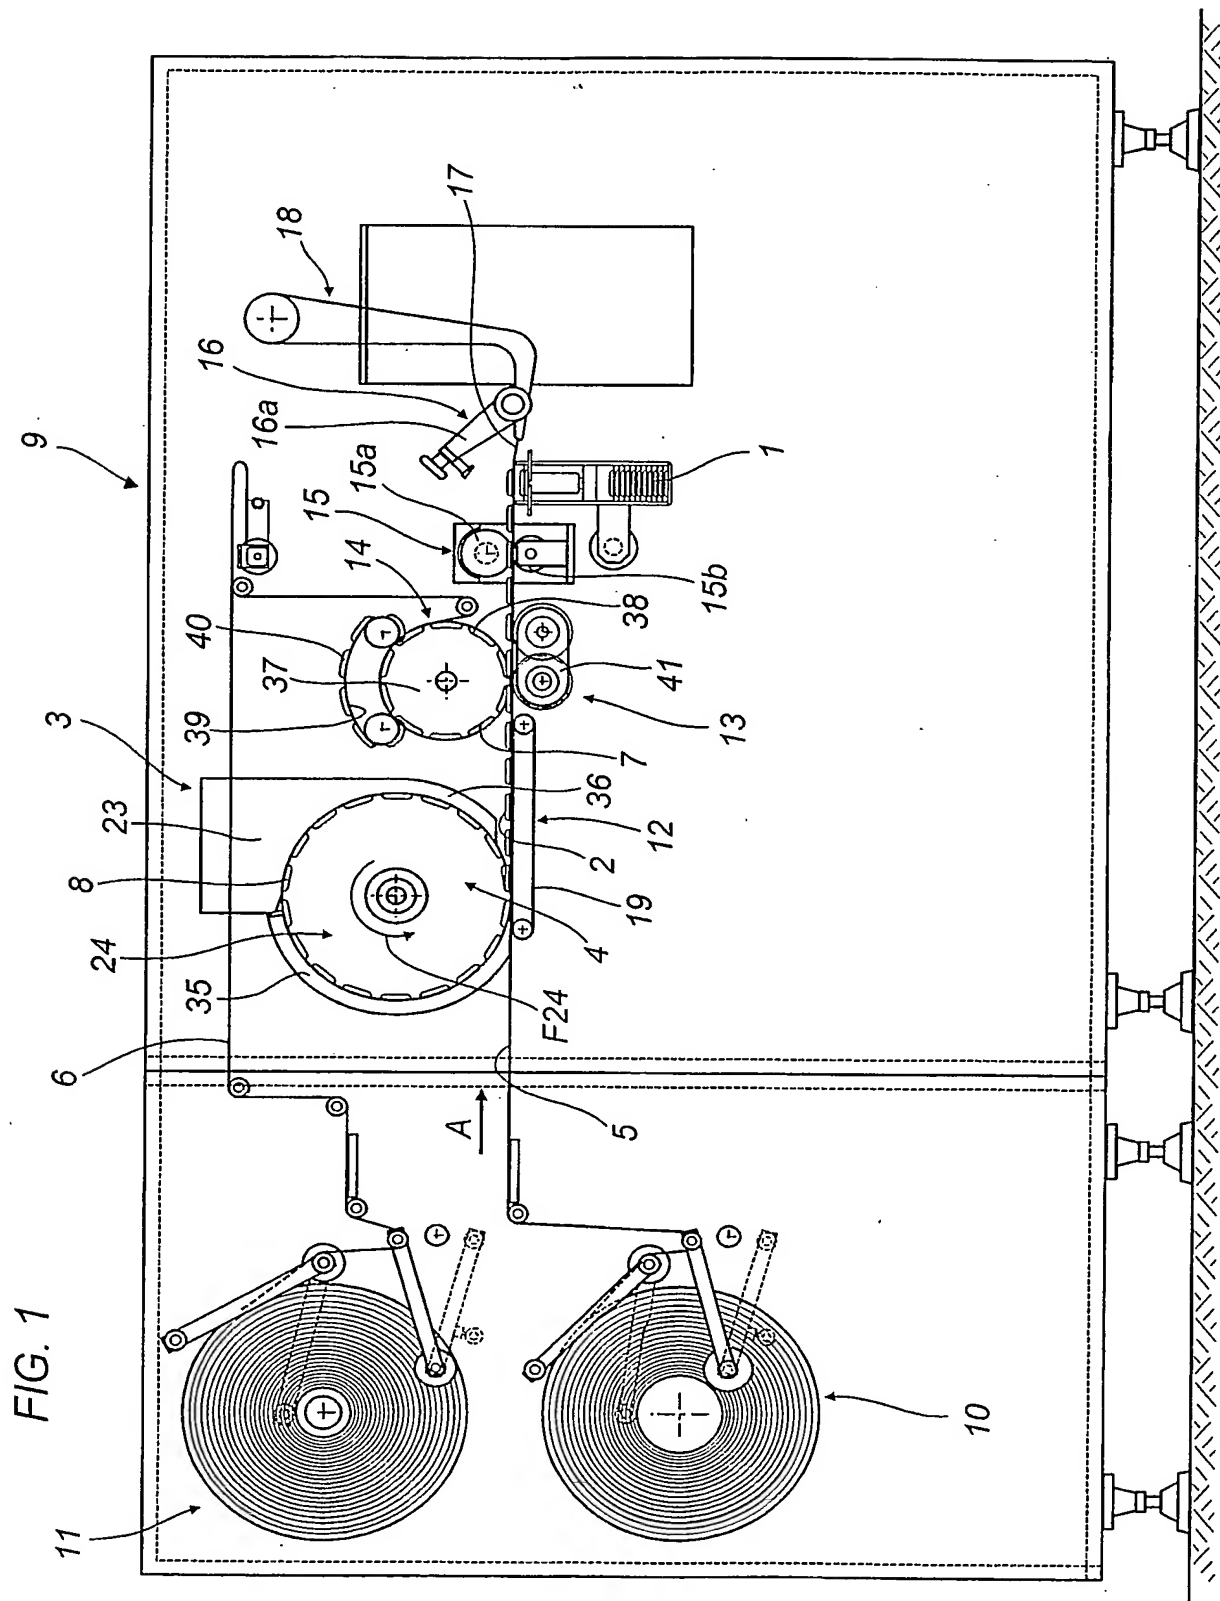

**THIS PAGE BLANK (USPTO)**

2/4

FIG. 2


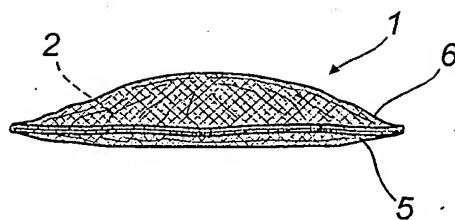



FIG. 3

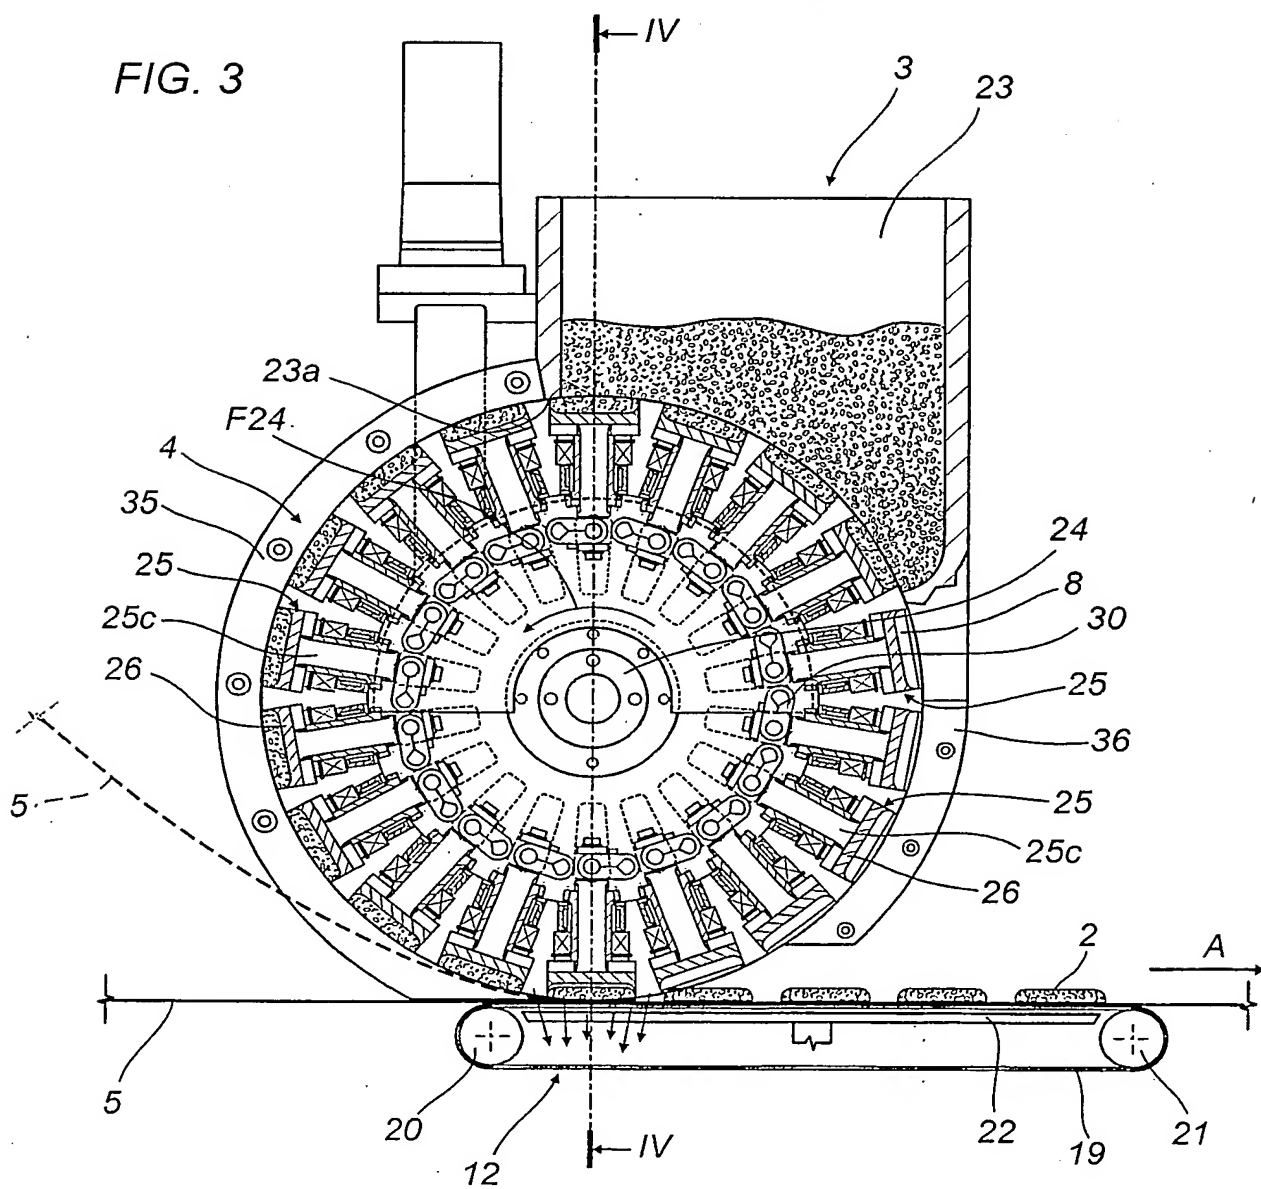

**THIS PAGE BLANK (USPTO)**

3/4


FIG. 4

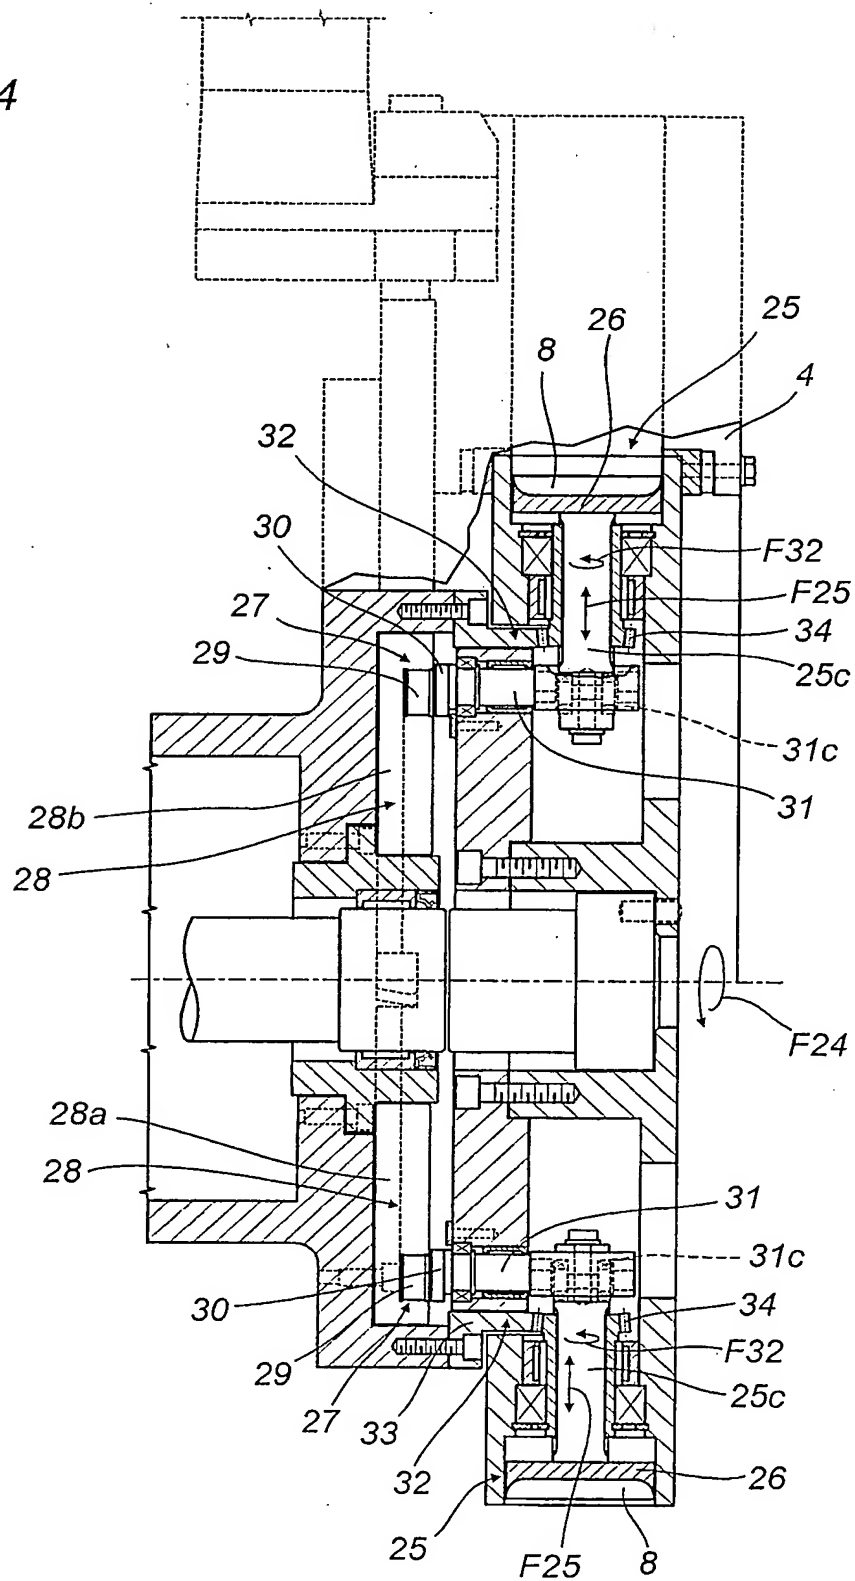

**THIS PAGE BLANK (USPTO)**



FIG. 5

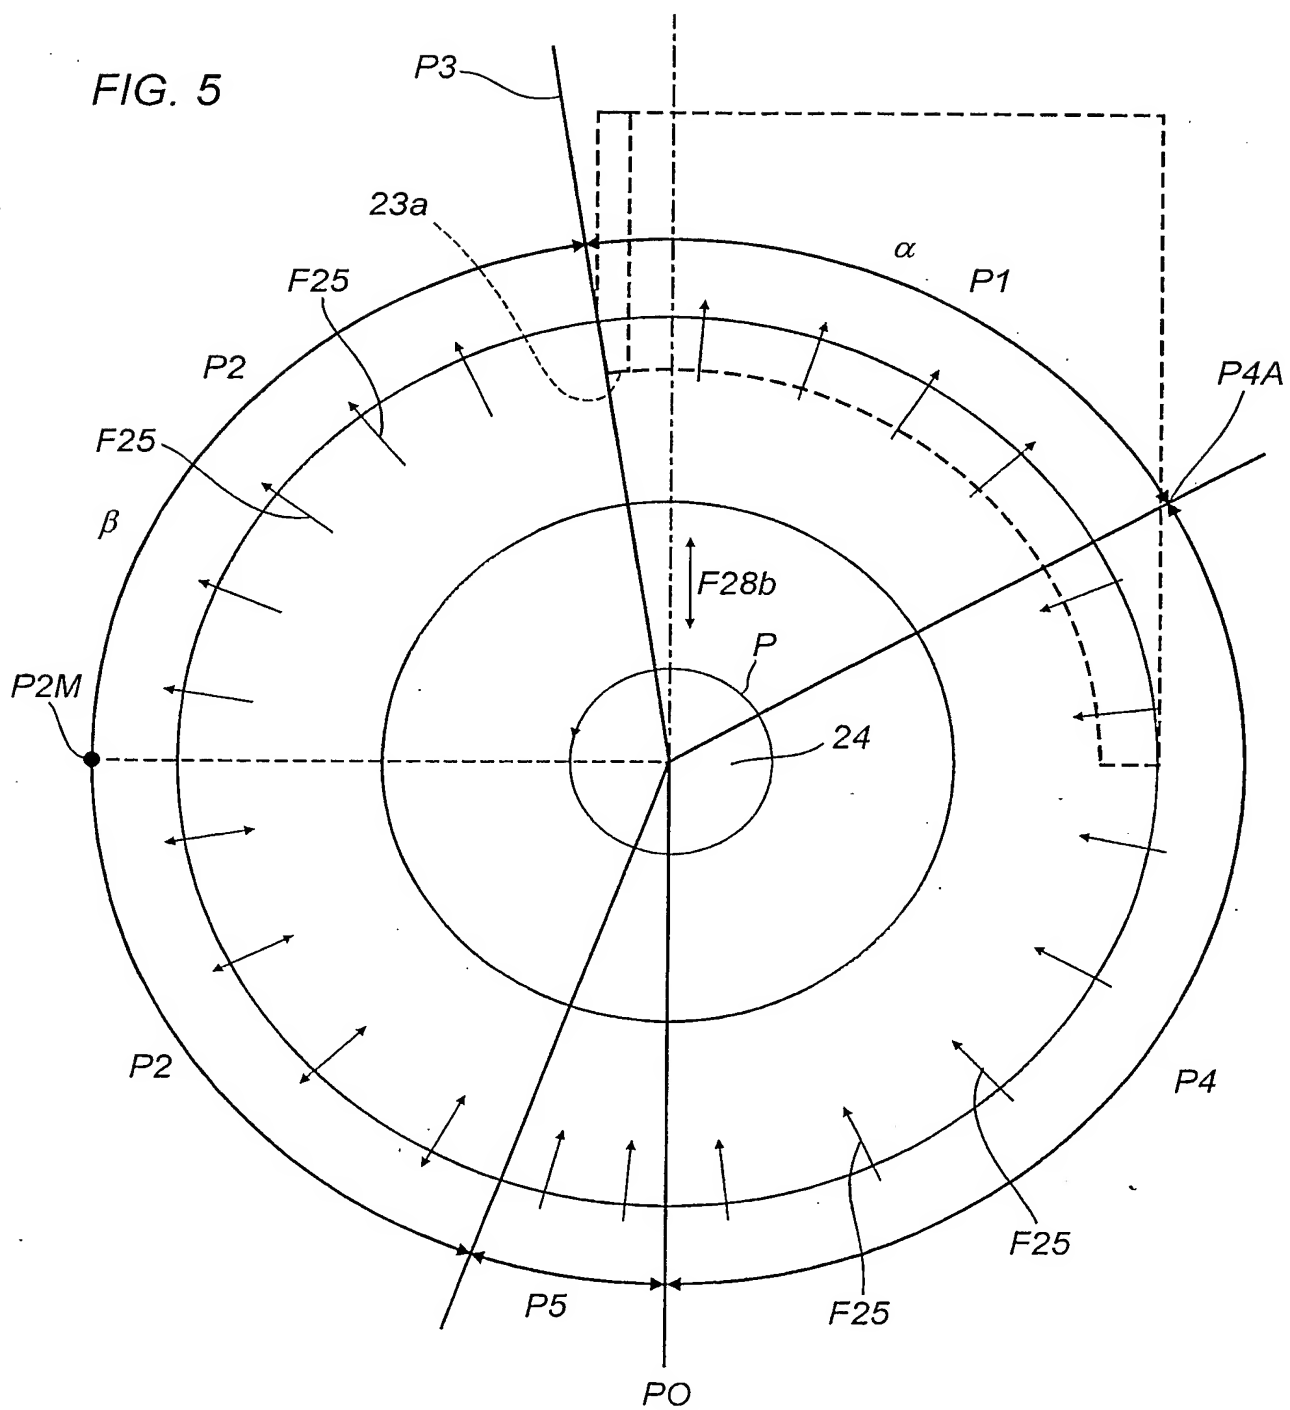

**THIS PAGE BLANK (USPTO)**

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2004/002502

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B65B29/02 B65B9/04 B65B9/02

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 437 294 A (ROMAGNOLI ANDREA) 20 March 1984 (1984-03-20)  column 4, line 52 - column 7, line 20; figures	1-4, 7-9, 12, 14, 16, 20-23, 27, 29
A	US 3 418 140 A (FISHER HARLAND S) 24 December 1968 (1968-12-24)  column 2, line 44 - column 4, line 32; figures	1, 3-5, 10, 12, 14, 16, 20
A	US 6 135 120 A (LOEFMAN LARS OLOF ET AL) 24 October 2000 (2000-10-24) column 3, line 44 - column 4, line 64; figures	1, 2, 7, 9
	----- -/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*O\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*G\* document member of the same patent family

Date of the actual completion of the international search

15 October 2004

Date of mailing of the international search report

22/10/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Greutzius, W

## INTERNATIONAL SEARCH REPORT

International Application No  
PCT/IB2004/002502

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 034 536 A (MAHAFFY REID A ET AL) 12 July 1977 (1977-07-12) column 4, line 36 - column 8, line 23; figures -----	6,15,28
A	US 4 870 808 A (ROMAGNOLI ANDREA) 3 October 1989 (1989-10-03) column 3, line 26 - column 5, line 15; figures -----	1,2,7,10
A	US 5 233 813 A (KENNEY ALAN G ET AL) 10 August 1993 (1993-08-10) column 4, line 17 - column 6, line 45; figures -----	13,17, 18,30
A	US 4 609 556 A (GOEDERT NICOLAS) 2 September 1986 (1986-09-02) -----	

## INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IB2004/002502

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4437294	A	20-03-1984	IT 1133279 B	09-07-1986
			CA 1163549 A1	13-03-1984
			CH 646387 A5	30-11-1984
			DE 3115589 A1	25-03-1982
			FR 2480707 A1	23-10-1981
			GB 2074133 A , B	28-10-1981
			JP 57001019 A	06-01-1982
US 3418140	A	24-12-1968	NONE	
US 6135120	A	24-10-2000	SE 506146 C2	17-11-1997
			AT 195474 T	15-09-2000
			AU 3201397 A	19-03-1998
			DE 69702861 D1	21-09-2000
			DE 69702861 T2	04-01-2001
			DE 921978 T1	21-10-1999
			DK 921978 T3	25-09-2000
			EP 0921978 A1	16-06-1999
			ES 2134180 T1	01-10-1999
			NO 990899 A	25-02-1999
			SE 9603073 A	17-11-1997
			WO 9808738 A1	05-03-1998
US 4034536	A	12-07-1977	NONE	
US 4870808	A	03-10-1989	IT 1207627 B	25-05-1989
			CH 672468 A5	30-11-1989
			DE 3807794 A1	22-09-1988
			GB 2201949 A , B	14-09-1988
			JP 2522686 B2	07-08-1996
			JP 63317401 A	26-12-1988
US 5233813	A	10-08-1993	AT 93798 T	15-09-1993
			DE 69003065 T2	16-12-1993
			DK 422157 T3	10-01-1994
			EP 0422157 A1	17-04-1991
			AT 181707 T	15-07-1999
			AU 1483995 A	18-05-1995
			AU 618893 B2	09-01-1992
			AU 5406990 A	29-11-1990
			CA 2031502 A1	29-10-1990
			CN 1046714 A	07-11-1990
			DE 69003065 D1	07-10-1993
			DE 69033194 D1	05-08-1999
			DE 69033194 T2	28-10-1999
			WO 9013487 A1	15-11-1990
			EP 0548057 A1	23-06-1993
			ES 2043369 T3	16-12-1993
			IE 64933 B1	20-09-1995
			IE 950203 L	28-10-1990
			IN 177265 A1	21-12-1996
			IT 1240815 B	17-12-1993
			NZ 233445 A	27-01-1993
			US 5459980 A	24-10-1995
			ZA 9003190 A	24-12-1991
US 4609556	A	02-09-1986	EP 0095542 A1	07-12-1983
			AT 20656 T	15-07-1986

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No  
PCT/IB2004/002502

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4609556	A	CA 1201090 A1	25-02-1986
		DE 3271934 D1	14-08-1986
		DK 363482 A ,B,	29-11-1983
		ES 8307639 A1	01-11-1983
		GR 77349 A1	11-09-1984
		IE 53195 B1	17-08-1988
		PT 75487 A ,B	01-09-1982

---

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**